

Ficha técnica Nº RC.ISO.33.M3838 • © Fiber Profil S. L. • 17/05/2024

Ref. RC.ISO.33.M3838

Covered molded grating, RC ISO33M3838

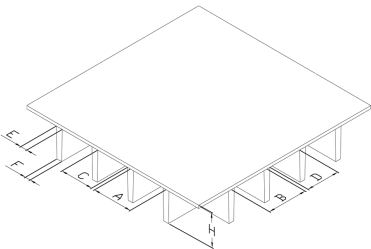
Gratings produced in compliance with standards ASTM D2583-07; ASTM D790-07e1; ASTM D638-08; ASTM G154-06; ISO 4589-2.

The quantity of fiber glass reinforcement is of 30% to 35% (by total weight).

Standard resin is isophthalic polyester with flame spread retardant → Rein IFR 25.

Flame spread rating ≤ 25 in compliance with standard ASTM E-84

All products have UV inhibitors and antioxidants.

PROPERTY	VALUE	
H	33,00 mm	
A	38,00 mm	
B	38,00 mm	
C	30,00 mm	
D	30,00 mm	
E	6,50 mm	
F	5,00 mm	
Weight (theoretical)	20,20 Kg/m ²	
Open surface	0,00 %	

KIND OF SURFACE	STATUS
G - Grit (silica)	Usually stocked
L - Checkered	Usually stocked
S - Smooth	On demand

STANDARD COLORS	STATUS
RAL 7035	Usually stocked
RAL 6001	On demand
RAL 1003	On demand

DIMENSIONS	STATUS
1000 mm × 2000 mm	Usually stocked
1000 mm × 3000 mm	On demand
1000 mm × 4000 mm	Usually stocked
1220 mm × 2440 mm	Usually stocked
1220 mm × 3660 mm	Usually stocked
1220 mm × 4000 mm	On demand
996 mm × 1985 mm	On demand
996 mm × 3012 mm	On demand
915 mm × 3050 mm	On demand
1524 mm × 4000 mm	On demand

PROPERTY	VALUE	TEST METHOD
Hardness	50,00 Bracol	ASTM 2583-07
Flexural strength	359,00 N/mm ²	ASTM 2583-07
E - Modulus of Elasticity (1% Secant)	10,50 N/mm ²	ASTM 2583-07
Tensile strength	208,00 N/mm ²	ASTM 2583-07

Tensile Modulus	31,90 N/mm ²	ASTM 2583-07
UV Resistance	4,00	ASTM 2583-07
Oxygen index	32,60 %	ASTM 2583-07

L(MM)	FLEXION	CONCENTRATED LOAD
300	2.4	938,00
450	3.6	634,00
600	4.8	492,00
750	6	346,00
900	7.2	234,00
1000	8	202,00
1200	9.6	157,00

L(MM)	FLEXION	DISTRUBUTED LOAD
300	2.4	12.983,00
450	3.6	3.834,00
600	4.8	1.615,00
750	6	992,00
900	7.2	489,00
1000	8	405,00
1200	9.6	236,00